


B BUILT MFG

HD-60, HD-72 BRUSH BUSTER

HD-60

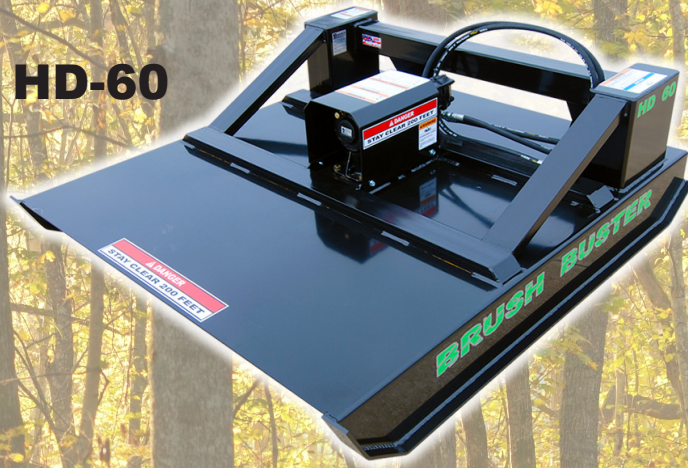


HD-72





HD-60

The B-Built HD-60 Brush Buster rotary cutter is designed to cut through thick weeds, brush, and trees up to 2" in diameter. The HD-60 Brush Buster has a 60" cutting width and made for standard hydraulic systems.

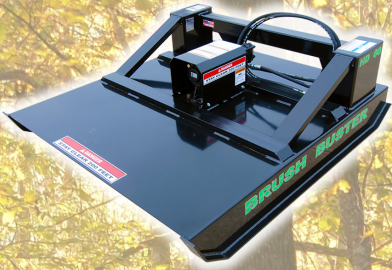

Features

- 3/16" steel deck with channel bracing
- 2 blades, 1/2" thick flywheel, and 2" cutting capacity
- Shear bolt for gear box protection
- High-tongue Eaton USA hydraulic motor for standard flow hydraulic systems
- Hydraulic pressure relief valve protects mower components
- Smooth shut down

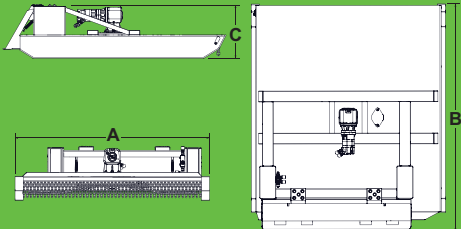

	HD-60	HD-72
A	64"	75-1/2"
B	71"	89"
C	24"	21-1/2"

HD-72

The B-Built HD-72 Brush Buster rotary cutter is designed to cut through thick weeds, brush, and trees up to 3" in diameter. The HD-72 Brush Buster has a 72" cutting width made for standard hydraulic systems.



Features

- 1/4" steel deck with laser cut bracing
- 2 blades, 1/2" thick flywheel, and 3" cutting capacity
- Shear bolt for gear box for protection
- High-tongue Eaton USA hydraulic motor for standard flow hydraulic systems
- Hydraulic pressure relief valve protects mower components
- Front and rear chain guard
- Smooth shut down

MODEL	HD-60	HD-72
CUTTING WIDTH	60"	72"
WEIGHT	750 lbs.	1280 lbs.
DECK THICKNESS	3/16"	1/4"
BLADE CARRIER TYPE	1/2" BALANCED DISK	1/2" BALANCED DISK
BLADES	1/2" x 3" STANDARD BLADE	1/2" x 4" STANDARD BLADE
BLADE ROTATION	CCW	CCW
MIN CUTTING HEIGHT	2"	2"
MAXIMUM CUTTING	UP TO 2" DIAMETER	UP TO 3" DIAMETER
MOTOR/GEAR BOX COUPLER	MACHINED STEEL	MACHINED STEEL
MOTOR PROTECTION	CUSHION BLOCK	CUSHION BLOCK
GEARBOX SEAL GUARD	STANDARD	STANDARD
REQUIRED GPM	15 - 25	15 - 25
HYDRAULIC COUPLERS	FLAT FACE COUPLER STD.	FLAT FACE COUPLER STD.
PSI MIN/MAX	2500 / 3000	2500 / 3000
SHIPPING WEIGHT	830 lbs.	1375 lbs.

1550 Fairgrounds Road
 Jefferson City, MO 65109
 Brandon Bungart: 573-619-1973
 Web: www.bbuiltmfg.com